

Section 8

Fridges

Upright Compressor Fridge/Freezers Upright Absorbsion Fridge/Freezers Portable Refrigeration Fridge Fans

Fridge Slides

Fridge Thermometers

Upright Fridge Accessories



RUSERES



DOMETIC RUA 5208X

Absorption refrigerator, 153 I

- Narrow cabinet design with slim footprint
- Dimensions (W x H x D): 550 x 1191 x 677 mm
- Reversible door suits any layout
- · Freezer compartment with internal door
- Easy-to-use control panel with colour TFT display
- T-rated cooling system ensures excellent cooling performance in all conditions
- Adjustable shelves and door bins
 Dometic RUA 5208X 6338



DOMETIC RUC 5208X

Compressor refrigerator, 153 I

- Narrow cabinet design with slim footprint
- Dimensions (W x H x D): 550 x 1191 x 677
- Reversible door suits any layout
- Freezer compartment with internal door
- Easy-to-use control panel with colour TFT display
- T-rated cooling system ensures excellent cooling performance in all conditions
- Adjustable shelves and door bins

Dometic RUC 5208X - 6339



DOMETIC RUA 6408X

Absorption refrigerator, 1881

- Generous gross capacity of 188 I
- Dimensions: 550 x 1447 x 677 mm
- Narrow cabinet design with slim footprint
- T-rated cooling system ensures excellent cooling performance in all conditions
- Automatic switching from DC to AC power when AC mains is available
- Easy-to-use control panel with colour TFT display
- Adjustable shelves and wire doors

Dometic RUA 6408X - 6342



DOMETIC RUC 6408X

Compressor refrigerator, 1881

- · Generous gross capacity of 1881
- Dimensions: 550 x 1447 x 677 mm
- Narrow cabinet design with slim footprint
- T-rated cooling system ensures excellent cooling performance in all conditions
- Automatic switching from DC to AC power when AC mains is available
- Easy-to-use control panel with colour TFT display
- Adjustable shelves and wire doors

Dometic RUC 6408X - 6343



DOMETIC RUA 8408X

Absorption refrigerator, 216 I

- · Generous capacity of 216 I
- Dimensions: 550 x 1657 x 677 mm
- Narrow cabinet design with slim footprint
- T-rated cooling system ensures excellent cooling performance in all conditions
- Automatic switching from DC to AC power when AC mains is available
- Easy-to-use control panel with colour TFT display
- Adjustable shelves and door bins

Dometic RUA 8408X - 6344



DOMETIC RUC 8408X

Compressor refrigerator, 2161

- · Generous capacity of 216 I
- Dimensions: 550 x 1657 x 677 mm
- Narrow cabinet design with slim footprint
- T-rated cooling system ensures excellent cooling performance in all conditions
- Automatic switching from DC to AC power when AC mains is available
- Easy-to-use control panel with colour TFT display
- Adjustable shelves and door bins

Dometic RUC 8408X - 6341

RX COMPR FRIGERATOR SE

- 3-in-1 cooling solution: fridge, freezer or both at the same time
- Energy-efficient high-end compressor with 3 operating modes (ECO/Performance/Quiet)
- Frameless door with dark grey front panel and full-width handle
 - Beveled rear side for maximal utilisation of space on board
 - Reversible door hinge can be fitted left or right as required
 - Dual function locks can also act as vents for your fridge
 - Modular installation frame (standard or flush-mount)

NRX-50C




Adjustable shelves x 2 Crisper x 2 Bottle holder x 1 Upper door shelf


W380xH525xL510Dmm Total Volume - 44L Fridge Volume - 4.4L Weight - 17Kg **Freestanding Power** Consumption (25°C ambient, 5°C fridge) - 0.77Amp/hr over 24hrs

NRX-50C - 6361





Bottle holder x 1 Upper door shelf



NRX-60C - 6362





W475xH625xL537Dmm Total Volume - 75L Fridge Volume - 6.6L Weight - 20Kg Freestanding Power Consumption (25°C ambient. 5°C fridge) - 1.05Amp/hr over 24hrs

NRX-80C - 6363







Adjustable shelves x 3 Crisper x 2 Bottle holder x 1 Egg shelf x 1 Upper door shelf

W525xH745xL568Dmm Total Volume - 113L Fridge Volume - 8.2L Weight - 26Kg Freestanding Power Consumption (25°C ambient, 5°C fridge) - 1.27Amp/hr over 24hrs

NRX-115C - 6364

NRX-130C







Adjustable shelves x 3 Crisper x 2 Bottle holder x 1 Egg shelf x 1 Upper door shelf

W525xH812xL568Dmm Total Volume - 113L Fridge Volume - 8.2L Weight - 26Kg **Freestanding Power** Consumption (25°C ambient, 5°C fridge) - 1.27Amp/hr over 24hrs

NRX-130C - 6365



DE105 Compressor Refrigerator – 105L



Dimension Incl Door Depth (HxWxD) 763 x 523 x 566mm **Enclosure Cut Out Dimensions (HxWxD)** 765 x 527 x 511mm Recommended built in depth 525mm Total volume 105L Volume of fresh food compartment 90L Volume frozen food compartment 15L Colour Black Usable power source 12V Door type hinging Right (reversible) Door panel included Yes


Unit weight 32.5Kg

T1274E Compressor Refrigerator – 274 L



Dimensions incl depth door (H x W x D) 1534 x 614 x 684mm **Enclosure Cut-Out Dimen**sions 1523 x 595 x 610mm Recommended built in depth 610mm Total Volume 274 L Volume fresh food compartment 202 L Volume frozen food compartment 72 L Usable power source 12V DC **Display LED** Door Shape Flat - Frameless Door type hinging Right (reversible) Door panel included N/A Net Weight 57Kg

N4141A- Absorption Refigerator- 141L



439 x 561mm **Enclosure cut-out** dimensions (H x W x D) 1504 x 424 x 540mm Total gross volume **Gross volume fresh** food compartment Gross volume frozen food compartment 15L Usable power source DC / AC / Gas **Display LCD Ignition Electric** Door Shape Flat -Door type hinging Right (reversible)

123L

Framed

Net Weight 39.3Kg

N4208 Absorption Refrigerator- 199 L (Left Hand Hinge)



Dimensions incl depth door (h x w x d) 1470 x 545 x 650mm Enclosure cut-out dimensions (h x w x d) 1465 x 534 x 585mm Total gross volume199 L Gross volume fresh food compartment 155.9 L Gross volume frozen food compartment 42.9 L Colour Black **Energy source selection Automatic Energy Consumption** 2.4 kWh/24h (160C)/ (Gas)300g/24h 6.2 kWh/24h(320C)/ (Gas) 550g/24h Usable power source DC / AC / Gas DisplayLCD **Ignition Electric Door Shape Curved-Framed** Door type hinging Left or Right Size door panel-3mm thickness (h x w)371.9 x 469mm (Frozen food compartment) 991.3 x 469mm (Fresh food compart-Door panel included





N4175-A - Absorption Refrigerator- 175 L (Right **Hand Hinge)**

Dimensions incl depth door (H x W x

D) 1250 x 546 x 628mm Enclosure cut-out dimensions (H x W x D) 1245 x 532 x 585mm Total gross volume170 L Gross volume fresh food compartment138 L Gross volume frozen food compartment31 L ColourBlack Usable power sourceDC / AC / Gas Energy Consumption (Gas)400 g/24h (16°C) 600 g/24h (32°C) 500 g/24h (average) **Energy Consumption (240V)** 2.7kWh/24h (16°C) 5.4kWh/24h (32°C) 4,1 kwh/24h (Average) **Energy Consumption (12V)** 225 Ah/24h (16°C)

N4175-A - 6436

450 Ah/24h (32°C) 338 Ah/24h (Avera

Net weight 53 Kg

DC-X Series 12V Fridges



DC50-X

FREE Mounting Kit Full 3 year warranty Great for a tight spot Internal 4L Freezer Tropical 'T' rating Interior LED light Adjustable shelves Reversible door

DC65-X

FREE Mounting Kit Full 3 year warranty Great for a tight spot Internal 4L Freezer Tropical 'T' rating Interior LED light Adjustable shelves Reversible door

Dimensions

Fridge: H 525mm, W 380mm, D 490mm

Minimum cut-out: H 530mm, W 385mm, D 490mm,

(Allows a 50mm gap at rear when installed with the door

sitting proud from the cabinetwork)

Weight 16.4kg

Temperature Settings: Fridge 4°, Freezer -12° (+/- 2°C)

12/24V

DC50-X - 6445

DC85-X



FREE Mounting Kit Full 3 year warranty Great for a tight spot Internal 4L Freezer Tropical 'T' rating Interior LED light Adjustable shelves Reversible door

Fridge: H 625mm, W 475mm, D 550mm Cut out: H 630mm, W 480mm, D 550mm (Allows a 50mm gap at rear when installed with the door sitting proud from the cabinetwork) Weight 21.5 kg

Temperature Settings: Fridge 4°, Freezer -12° (+/- 2°C) 12/24V

DC85-X - 6447

Dimensions

Fridge: H 525mm, W 450mm, D 515mm Cut out: H 530mm, W 455mm, D 515mm

(Allows a 50mm gap at rear when installed with the door

sitting proud from the cabinetwork)

Weight 18 kg

Temperature Settings: Fridge 4°, Freezer -12° (+/- 2°C)

12/24V

DC65-X - 6446

DC130-X



FREE Mounting Kit Full 3 year warranty Great for a tight spot Internal 4L Freezer Tropical 'T' rating Interior LED light Adjustable shelves Reversible door

Fridge: H 750mm, W 525mm, D 550mm Cut out: H 755mm, W 530mm, D 550mm

(Allows a 50mm gap at rear when installed with the door

sitting proud from the cabinetwork)

Weight 26 kg

Temperature Settings: Fridge 4°, Freezer -12° (+/- 2°C)

12/24V

DC130-X - 6448





BUSHMAN DC190L190L Caravan Fridge - 12V / 24V

AVAILABLE IN BLACK OR WHITE





FREE Mounting kit
Super efficient design
Powerful cooling
Genuine Bushman system
Beautifully finished
Large door storage
Reversible doors
Tropical 'T' rating
Door latch for mobile use
Full 3 year warranty

Technical Specifications
Temperature Settings: Fridge 4°,
Freezer -12° (+/- 2°C)
Fridge: H 1380 mm, W 600mm, D
600mm
Cut out: H 1385mm, W 605mm, D
575mm (allows 50mm gap at
rear)
Weight 50 kg

DC190-L BLACK - 6449BLACK

BUSHMAN DC230-X 230L Caravan Fridge - 12V / 24V





What's included
Ultra low-power
Tropical rated for 43°C
5 Year compressor warranty
Big door storage
Internal 45L Freezer
Reversible door
Crisper
Mounting kit included

Temperature fridge
4° (+/- 2°C)
Temperature freezer
-12° (+/- 2°C)
Fridge dimensions
Height 1460mm, Width 595mm, Depth 575mm
Minimum cut out (with mounting kit)
Height 1465mm, Width 600mm, Depth 575mm
(Allows a 50mm gap at rear when installed with the door sitting proud from the cabinetwork)
Weight
51 kg

BUSHMAN DC230-X 230L Caravan Fridge - 12V / 24V - 6450Black

BUSHMAN







Bushman Roadie 15L

Includes
FREE Transit Cover
FREE Tie Down Brackets
FREE Padded Shoulder Carry Strap
FREE Stainless Steel Cam Buckle Straps

Super Compact + Premium Quality Fridge / Freezer

Australia's best 15L portable fridge freezer, bar

Specifications
Set temperature range -18° to 10°
Operates up to a 30° angle
10 A built in fuse
Nidec Danfoss BD1.4VSD
Variable speed drive compressor

Length 535mm Width 220mm Height 380mm

Weight 10kg Low current cut in 10.9V, cut out 9.6V

Bushman Roadie 15L - 6451

Full steel cabinet

Original Bushman Fridge SC35 35L Camping Fridge / Freezer - 12V / 240V



5 Year warranty
240V to 12V transformer
2 Internal stacking baskets
4 Heavy duty tie down points
+ Free Transit Cover
Specifications
Digital Thermostat with LCD screen

Set temperature range -18° to 10° Average 0.5 amps per hour (set at -4° in 25° ambient)

Variable speed drive compressor (2A - 4.5A)

Battery protection cut out 10.4 V L 690mm x W 385mm x H 380mm Weight 22.5kg

Original Bushman 35L - 6452

Original Bushman Fridge SC35-52 35L to 52L Camping Fridge - 12V / 240 10L extension collar

7L dome lid 3 stacking baskets 240V – 12V adapter

4 Heavy duty tie-down brackets + Free transit cover

Specifications
Digital thermostat with LCD screen
Set temperature range -18° to 10°

Average 0.67 Ah in 52L (set at -4° in 25° ambient)
Variable speed drive compressor (2A - 4.5A)

Battery protection cut out 10.4 V L 690mm x W 385mm

35L H 380mm, 42L H 475mm, 45L H 465mm, 52L H 545mm

35L W 22.5kg

Original Bushman 35L - 52L - 6453



^> DOMETIC CFF 20

[™] **^>** DOMETIC

CFF 70DZ Pack

Portable fridge and freezer, 70 I, insulated cover included

Dometic's versatile addition to the portable fridge and freezer range comes with a stylish design, dual zone compartments and is complemented by an efficient interior storage layout that will suit all types of outdoor enthusiasts. The full wrap evaporators built into the CFF 70DZ Pack ensures excellent cooling performance and it comes with an insulated cover that provides maximum protection 70 (40/30) I of storage for convenient cooling and/or freezing

.Dimensions depth, 443mm Dimensions height, 500mm Dimensions width, 914mm

CFF 70DZ Pack - 6513



Portable fridge or freezer, 21 I

Dometic's versatile addition to the portable fridge/freezer range features a lightweight and extremely compact design that can be taken on any outdoor adventure. Fitted with strong handles, a removable lid and an efficient interior storage layout, the CFF 20 combines convenience with excellent cooling performance Dimensions depth, 660mm Dimensions height, 430mm Dimensions width 283mm

CFF20 - 6460

^>DOMETIC CD 30 Drawer Fridge



Dimensions W440 x H250 x D730 (closed) / 1040(opened) mm Weight 18 Kg Capacity 30 Litres Power Power Source 12/24 Volts

CD30 Drawer Fridge - 6465

♦ DOMETIC CFF-12



Portable fridge or freezer, 13L
This remarkably lightweight Portable
fridge or freezer is compact and easy to
use. inside your vehicle.
Dimensions depth, 562mm
Dimensions height, 380mm
Dimensions width, 235mm

CFF12 - 6520

Dimensions W200 x H298 x L442 mm Weight 3.2 kg Capacity 8 Litres Voltage 12 Volts Temperature Range Up to 20°C below ambient, cold/warm switch

- Built-in seat-belt slot for safety and security - Adjustable shoulder strap

TB - 08G - 6620



◇> DOMETIC CFF 45-pack



Portable fridge/freezer, 44 I

Dometic's versatile addition to the portable fridge/freezer range comes with a stylish design, double-sided opening lid and is complemented by an efficient interior storage layout that will suit all types of outdoor enthusiasts. The full wrap evaporator built in to the CFF 45 Pack ensures excellent cooling performance and it comes with a cover that provides maximum protection.

Dimensions depth, 398mm Dimensions height, 475mm Dimensions width, 715mm

CFF45 Pack - 6521

^> DOMETIC

TB - 08G



/olts ient, ritch

◇ DOMETIC

TCX - 21FL



Dimensions W303 x H420 x L450 mm Weight 6 kg approx. Capacity 21 Litres Voltage 12/24V DC or 240V AC Temperature Range Cooling capacity: Up to 30°C below ambient

Warming Capacity: Up to 65°C
- Plug straight into mains power or cigarette lighter.


TCX - 21FL - 6595

^> DOMETIC TCX - 14FL



Dimensions W303 x H328 x L450 mm
Weight 5 kg approx. Capacity 14 Litres
Voltage 12 V DC, 24V DC or 240V AC
Temperature Range Cooling Capacity: Up
to 30°C below ambient
- Plug straight into mains power or
cigarette lighter.
TC - 14FL - 6615

FRIDGES

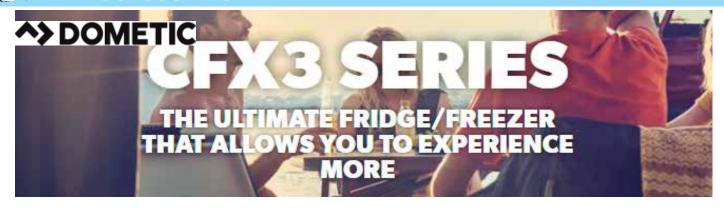

The Dometic CFX3 is the most impressive portable fridge/freezer we've ever made. With six models to choose from, including the world's first powered cooler with integrated ice maker and two with dual-zone compartments, you'll have no problems finding a CFX3 to suit your needs!

CFX3 25

DIMENSIONS

Dimensions product depth 569 mm
Dimensions product height 420 mm
Dimensions product width 3342mm
Net weight 13.4 kg
Gross volume 25.00 I
Storage volume - total 25.00 I
ELECTRICAL
Input voltage (AC) 100-240 V
Input voltage (DC) 12/24 V
Input frequency 50/60 Hz

CFX3 25 - 6457

CFX3 35

DIMENSIONS

Dimensions product depth 694 mm
Dimensions product height 407 mm
Dimensions product width 398 mm
Net weight 16.9 kg
Gross volume 36.00 I
Storage volume - total 36.00 I
ELECTRICAL
Input voltage (AC) 100-240 V
Input voltage (DC) 12/24 V
Input frequency 50/60 Hz

CFX3 35 - 6458

CFX3 45

DIMENSIONS

Dimensions product depth 694 mm Dimensions product height 476 mm Dimensions product width 398 mm Net weight 18.7 kg

Storage volume - total 46.00 I ELECTRICAL Input voltage (AC) 100-240 V Input voltage (DC) 12/24 V Input frequency 50/60 Hz

Gross volume 46.00 I

CFX3 45 - 6481

CFX3 55W

DIMENSIONS

Dimensions product depth 455 mm Dimensions product height 480 mm

Dimensions product width 720 mm Net weight 20.4 kg Gross volume 55.00 l Storage volume - total 55.00 l ELECTRICAL Input voltage (AC) 100-240 V

Input voltage (AC) 100-240 V Input voltage (DC) 12/24 V Input frequency 50/60 Hz

CFX 55 - 6456

CFX3 55IM







PORTABLE FRIDGE/FREEZER WITH ICE MAKER, 53 L DIMENSIONS

Dimensions product depth 455 mm Dimensions product height 480 mm Dimensions product width 720 mm Net weight 21.3 kg Gross volume 55.00 l Storage volume - total 53.00 l ELECTRICAL

> Input voltage (AC) 100-240 V Input voltage (DC) 12/24 V Input frequency 50/60 Hz

> > CFX 65W - 6506



THE ULTIMATE FRIDGE/FREEZER THAT ALLOWS YOU TO EXPERIENCE

^> DOMETIC

♦ DOMETIC

CFX3 75DZW Dual Lid DUAL ZONE FRIDGE/FREEZER

DIMENSIONS

Dimensions product depth 495 mm Dimensions product height 472 mm Dimensions product width 892 mm Net weight 27.8 kg Gross volume 75.00 l Storage volume - total 75.00 I **ELECTRICAL** Input voltage (AC) 100-240 V Input voltage (DC) 12/24 V Input frequency 50/60 Hz

CFX PROTECTIVE COVERS



The cover protects from moisture, dust and dirt. It also provides effective insulation, improving the cooling capacity

CFX3 PC35 - 6525 CFX3 PC45 - 6526 CFX3 PC55 - 6527

CFX3 PC75 - 6529 CFX3 PC95 - 6530

CFX3 75DZW - 6502

CFX3 95DZW Dual Lid

Dimensions product depth 530 mm Dimensions product height 472 mm Dimensions product width 962 mm

CFX Fixing Kit

DUAL ZONE FRIDGE/FREEZER

DIMENSIONS

Net weight 29.8 kg Gross volume 94.00 l Storage volume - total 94.00 l **ELECTRICAL** Input voltage (AC) 100-240 V Input voltage (DC) 12/24 V Input frequency 50/60 Hz

CFX 95DZW - 6512



CFX-28 Fixing Kit

>> DOMETIC

Suitable for the CFX-28 only, this kit is designed to secure the portable fridge and freezer in the vehicle with a quick release mechanism for easy removal without any tools.

CFX 28 Fixing Kit - 6469



Designed to suit all CFX portable fridge and freezers. Includes four fixing points, low profile tie-down anchor points, strong metal D-ring, shake proof nuts, heavy duty straps and quick release buckles

CFX Fixing Kit - 6470

CFX-SLD35/40 Fridge Slide



Net weight 16.5 kg CFX 35/40 Fridge Slide - 6494 CFX-SLD50/65 Fridge Slide



Net weight 17 kg CFX 50/65 Fridge Slide - 6493 CFX-SLD95/100 Fridge Slide



CFX 95/100 Fridge Slide - 6495

DOMETIC

RAPS 12R-U2



6 metres of heavy-duty 6 mm cable - Choice of socket-heavy duty hella style and cigarette type both built in installation kit with snap action mounting plate included.

RAPS 12R-U2 - 6585

DOMETIC

12/240V **Adapter** EPS817A



Suits CDF series and CF-18 to CF-60 thermoelectric coolboxes or as a universal power unit via the integrated cigarette lighter socket.

EPS817A - 6590

^> DOMETIC **CFX Wireless Temperature-Display**



Shows the internal temperature of the fridge from a distance. It also shows the voltage protection level set and has adjustable alarm limits that enable an audible warning if the temperature rises or the battery gets low. Suitable for CFX 28 and other CFX models without WiFi app function Displays fridge temperature, fridge power source and battery protection

Two-levels temperature alarm setting. with audible and visual alarm Wireless operation (2.4 GHz) Backlit display when 12 or 24 V DC connected 1.8 m lead

CFX Wireless Display - 6631

setting

Fridge Switch





With a built in electronic movement and vibration sensor which switches the 12 volt circuit of the caravans 3 way fridge on when the vehicle is moving and turns the fridge off when the vehicle stops. 12 VOLT 25 AMPS No more flat batteries when the fridge is left on. Only one auxiliary line needed. Automatically turns your caravan fridge on and off. Easy 15 minute installation. The Fridgeswitch measures L100mm x W52mm x H30mm

MITER

Fridge Switch - 0325

Fridge Deodoriser - Twin Pack



Suitable for up to 200L Fridges Just shake pack once a month to refresh **Activated Carbon** Food stays fresher longer Lasts up to 3 months

Fridge Deodoriser Twin Pack- 0341

Fridge Slides - 125kg




Make up your own slides for fridges, batteries and BBQ's. Lockable Pair

> 300mm - 0270 400mm - 0271 500mm - 0272 600mm - 0273

700mm - 0274

Fridge Cool Fan





Fridge Cool Fan - 0337 **Thermostatic Control Fridge Cooling Fan**



Thermostatically controlled. 12 volt

Thermostatic Control Fridge Cooling Fan - 0339

Solar Fridge Fan



Solar Fridge Fan - 0340





Aluminium Fridge Stand

No Mould



No-Mold features a unique design that holds your refrigerator and freezer doors open, allowing ventilation to help prevent mold and odors from forming during

No Mold - 0348

Digital RV Fridge Thermometer



The ideal companion to any portable fridge freezer or esky. Easy to read Celsius or Fahrenheit. Size 63mm x 63mm x 12mm Range: Indoor -20 degrees to +70 degrees, Outdoor -50degrees to -70 degrees



RV Fridge Thermometer - 0514

Fridge Fan

uneven surfaces

scratching

Heavy duty aluminium frame

Aluminium Fridge Stand - 6890

Maximum weight capacity 100kg

2 height settings for fridges/coolers

Adjustable leg - for easy levelling on

Soft touch foam to protect fridge from

ALTERI



Helps cool fridge by up to 40% more on hot days. Thermostatically controlled. 3.6 meter cable. 12 volt.

Fridge Fan - 0347

storage.



Horizontal RV Fridge Thermometer





Hangs Or Stands On Fridge Rack Or Shelf Easy To Read Celcius Or Fahrenheit Shatter Proof Lens 130mm X 30mm Safe Temperature Zones.

Horizontal RV Fridge Thermometer - 0516

Vertical RV Fridge Thermometer





Clips or attaches with suction cup Easy To Read Celcius Or Fahrenheit **Shatter Proof Lens** 73mm X 20mm Safe Temperature Zones

RV Fridge Thermometer - 0517

Bubble Level





Great for your caravan or RV Fridge. Make sure your levels are right to get the best out of your 3 way fridge. 45mm

Surface Level - 0234

Refrigerator **Bars**





Keep order in your RV refrigerator and cupboards during travel. Refrigerator bars extend from 16" to

28". Comes in pack of 3.

Refrigerator Bars - 0576



Vitrifrigo 65 Upright Fridge C60I



Specifications
Fridge Dimensions: 470mm(w) x 622mm(h) x 415mm(d)
Weight: 20kg
Capacity: 60L
Freezer Capacity: 10.2L

C60I - 6660



Vitrifrigo 80 Upright Fridge C85I



C851 - 6675



Vitrifrigo 110 Upright Fridge C115I



Specifications Fridge Dimensions: 485mm(w) x 791mm(h) x 427mm(d) Weight: 25 KG Capacity: 85L

> Freezer Capacity: 12.8L C115I - 6690

^> DOMETIC

RM-2350 90 Litre FridgeFreezer



This refrigerator uses Dometic's Absorption technology. Featuring manual ignition for gas operation and thermostatic control for 240 V and gas. Overall Dimensions: 766mm H x 556mm W x 57mm D

Consumption:

Electric: 240 Volts, 175 watts Battery: 12 Volts, 10.5 amps LP Gas: 13 g/ph

Capacity: 90 litres (incl. 11 litre freezer) Weight: 26.5kg

RM-2350 - 6820

^> DOMETIC

95L RM2356 3 WayFridgeFreezer



The Dometic RM 2355 is a performance enhanced refrigerator designed and manufactured for life on the road. Offering you the choice between three energy sources – LP Gas, 12 V DC

and 240

Dimensions
Dimensions product depth 577 mm
Dimensions product height 766 mm
Dimensions product width 556 mm
Gross volume (DIN15502) 90.00 I
Storage volume - total (DIN15502) 83 I
Net weight 29 kg

RM-2356 - 6822

